


Quick Installation Guide

EET40-75K - M1


① Overview

1.1 Scope of Delivery

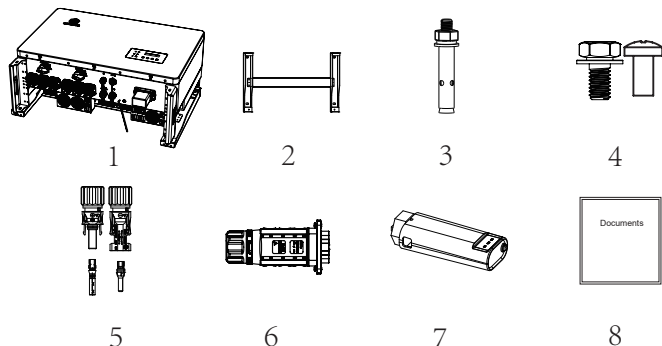

No.	Description	Quantity
1	Inverter	1
2	Wall Bracket	1
3	Expansion Screws	4
4	Fastening Screws	3
5	DC Connectors	12 Pairs
6	AC Connector	1
7	WiFi/GPRS Stick	1
8	Documents	1


1.2 Port Description

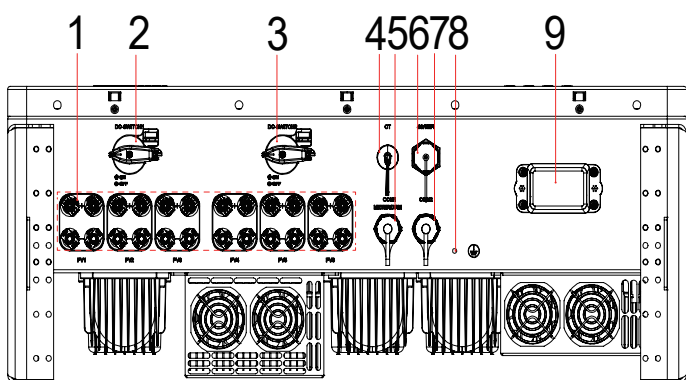

No.	1	2&3	4	5	6	7	8	9
Name	PV Ports	DC Switch	CT Port	COM/Meter /DRM	Wifi/GPRS	Communication Ports 2	Grounding Port	AC Port

② Mechanical Installation

2.1 Installation Requirement

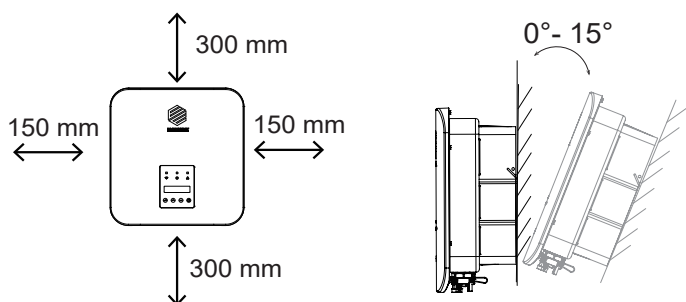


- 1) A minimum 150 mm clearance should be kept between two inverters and a minimum 300 mm clearance between inverters and the ground.
- 2) Install inverter vertically or with a backward tilt within 15°.




Warning

Do not select locations storing flammable material, which may cause fire or explosion!


2.2 Mounting



- 1) Drill 3 mounting holes of about 4 cm deep with a 10 mm drill bit
- 2) Insert expansion tubes into holes
- 3) Fix the bracket on the wall with screws
- 4) Hang the inverter on the bracket

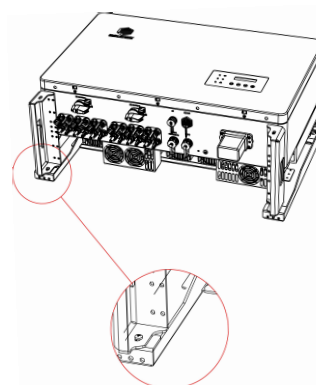


2.3 Wifi/GPRS Stick Logger Installation



- 1) Plug the stick to the Wifi port on the inverter
- 2) Rotate the front operative part of the stick clockwise till the secure connection of the stick.

③ Electrical Connection

3.1 Assemble DC connectors

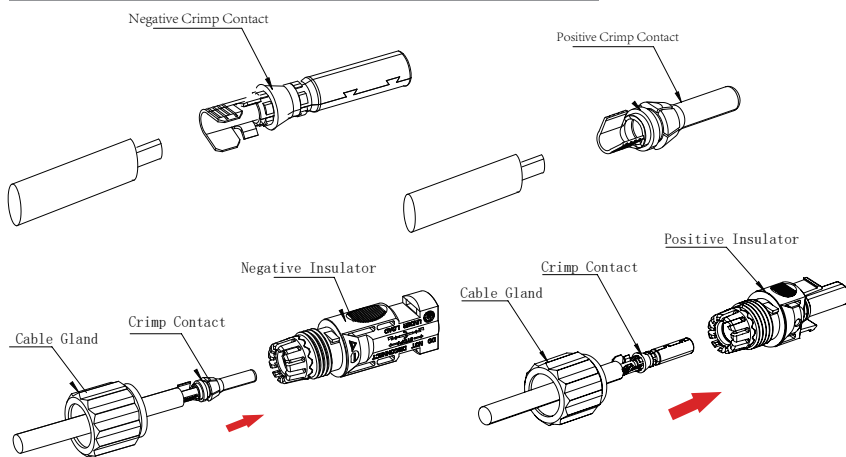


- 1) Strip off the DC Cable for a little length.
- 2) Insert the wire into the Crimp Contact and crimp them with an electrical crimp-er.

- 3) Thread the cable through the Cable Gland, insert it into the insulator, and gently pull back the cable to ensure firm connection.
- 4) Then screw up the Cable Gland to the Insulator.

3.2 Install DC connectors to Inverters


- 1) Turn the Grid Supply Main Switch OFF.
- 2) Turn the DC switch OFF.
- 3) Connect the DC connectors to the Inverter, small click confirms connection.

- 2) Thread the AC cable through the Nut, Seal Ring and the Housing.

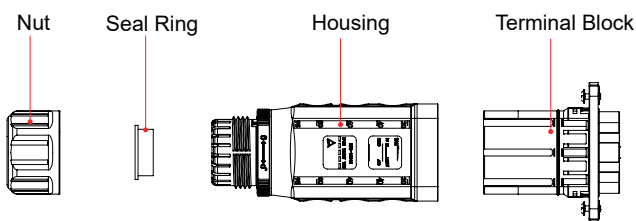

- 2) insert the wires into corresponding holes of terminal Block which is already assembled in the AC port of the inverters by the manufacturer, and fasten the wire to the terminal block with a screwdriver.


2.4 External Grounding Connection

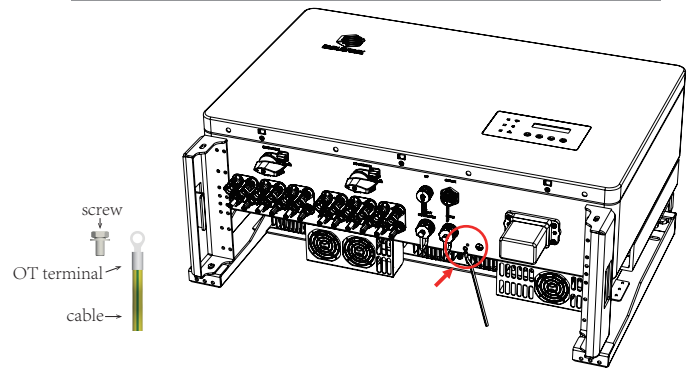

- 1) Crimp a grounding cable to the OT terminal
- 2) Insert a fastening screw into the OT terminal
- 3) Insert them to the grounding port of the inverter
- 4) Screw them together(the torque is 2 N.m.).

3.3 AC Side Connection of Inverters

- 1) Strip off the insulational of AC cable about 25 to 30 mm.

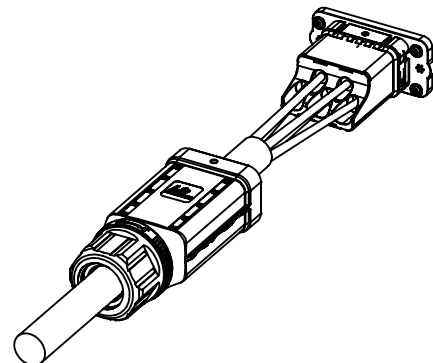

- 3) Push the housing to the terminal block and a sound of click will be heard after success of fastening. Then screw up the nut tightly.